

描述

- 产品尺寸: XX x XX x 370mm
- 水嘴高度: 185mm
- 水嘴长度: 200mm
- 反射系统运行平稳, 移动方便、自动回缩和安全对接
- G1/2 接口
- 金属结构, 以后缀标识区分不同表面处理工艺
- Duralock™ 快速连接安装
- 68 英寸编织软管的抽拉喷头
- 带 G1/2 接口的柔性供水管路, 可连接至角阀
- 360° 旋转水嘴

操作

- 杠杆式手柄
- 操作力度小于 5 磅
- 可在拉出或缩回位置以流水或喷雾模式操作
- 在水槽外为容器注水时, 当水龙头经过台面时, 暂停功能可方便地停止水流

流量

- 0.1 Mpa 时的水流量约为 3.0 升/分钟至 4.5 升/分钟
- 0.1 Mpa 至 0.3 Mpa 时, 水流差限制在最大 3.0 升/分钟。

阀芯

- 1255TM Duralast™ 阀芯, 用于单把手龙头

执行标准

- 设计符合 GB18145 和 GB25501 (1 级)

质保期


- 漏水和滴水有限质保5年



单把手下拉式厨房龙头

型号: GNMCL87006 系列

注意: 该龙头可安装在最小直径为 38 毫米的孔中。

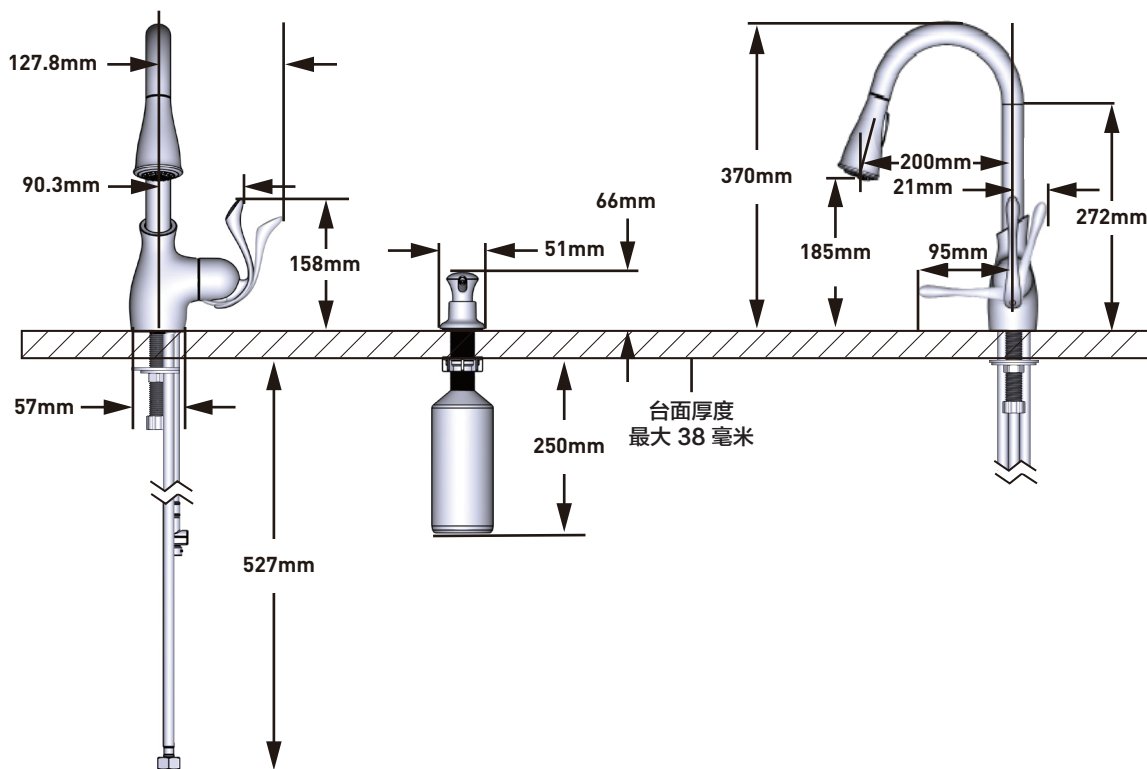

DESCRIPTION

- Product Dimensions: XX x XX x 370mm
- Reach height: 185mm
- Reach length: 200mm
- Reflex system offers smooth operation, easy movement, self-retraction, and secure docking
- G1/2 inlet connections
- Metal construction with various finishes identified by suffixes
- Duralock™ quick connect installation
- Pullout spray with 68" braided hose
- Flexible supply lines with G1/2 connection to supply stop
- 360° rotating spout

OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

- Water flowrate is about 3.0 L/min to 4.5 L/min at 0.1 Mpa
- Water flow difference is limited to 3.0 L/min maximum from 0.1 Mpa to 0.3 Mpa

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS

- Designed to meet GB18145 ; GB25501 (Grade 1)

WARRANTY

- 5 years limited warranty against leaks and drips



Single Handle High Arc Pulldown Kitchen Faucet

MODELS: GNMCL87006 Series

NOTE: This faucet is designed to be installed through 38 mm min. diameter hole.

