

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with various finishes indentified by suffix
- G1/2 inlet connections
- Includes 600mm long flexible inlet hoses
- Pullout spray with 1723mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout provides ability to install handle on either side

OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pullout or retracted position
- When filling a vessel outside the sink, the pause feature conveniently stops the flow of water as the wand passes over the counter top

FLOW

- Water flowrate is about 3.7L/min at 0.1Mpa with aerator.
- Water flowrate is about 6.3L/min at 0.3Mpa with aerator.
- Spray water flowrate is about 4.6L/min at 0.3Mpa.

CARTRIDGE


- MOEN Duralast cartridge.

STANDARD

- Designed to meet GB 18145 ; HJ/T 411-2007

WARRANTY

- 5years limited warranty against leaks and drips

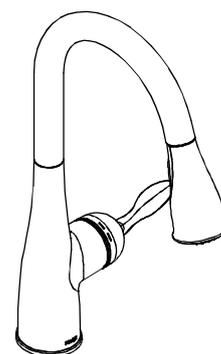


ARBOR

Single Handle High Arc
Pulldown Kitchen Faucet

Models: GN69800 Series

NOTE: THIS FAUCET IS DESIGNED TO BE
INSTALLED THRU 34mm MIN. TO 38mm
MAX. DIA. HOLE

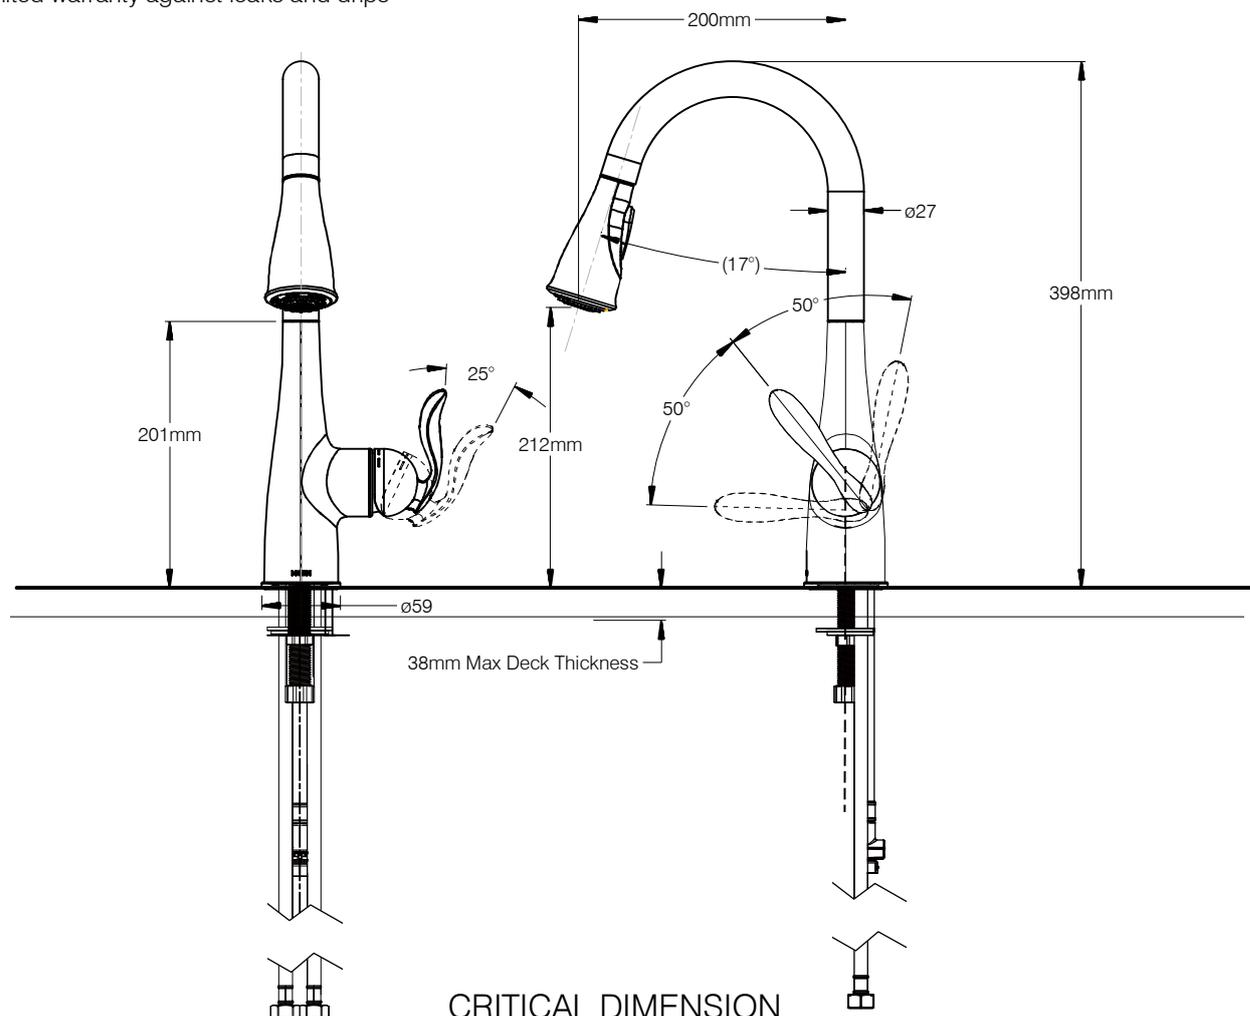

CRITICAL DIMENSION

(DO NOT SCALE)