

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with a chrome finish
- 600mm Flexible supplies with G1/2 inlet connections

OPERATION

- Lever style handle
- Temperature controlled through 90 degree arc of handle travel

FLOW

- Water flowrate is about 3.0L/min to 4.5L/min at 0.1MPa
- Water flow difference is limited to 3.0L/min maximum from 0.1 MPa to 0.3 MPa

CARTRIDGE


- SEDAL cartridge

STANDARDS

- Designed to meet GB 18145; GB 25501

WARRANTY

- 5 years limited warranty against leaks and drips

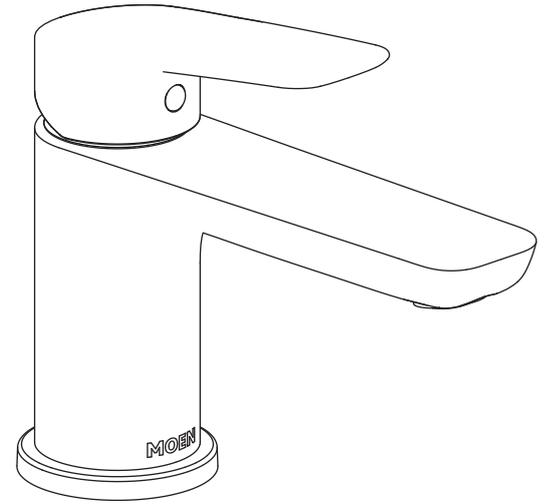



YORK

Single Mount One-Handle Lavatory Faucet

MODELS GN10123MCL02

GN98123

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 32mm MIN. TO 38mm MAX. DIA. HOLE

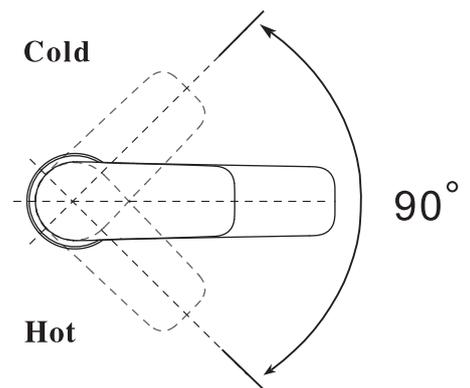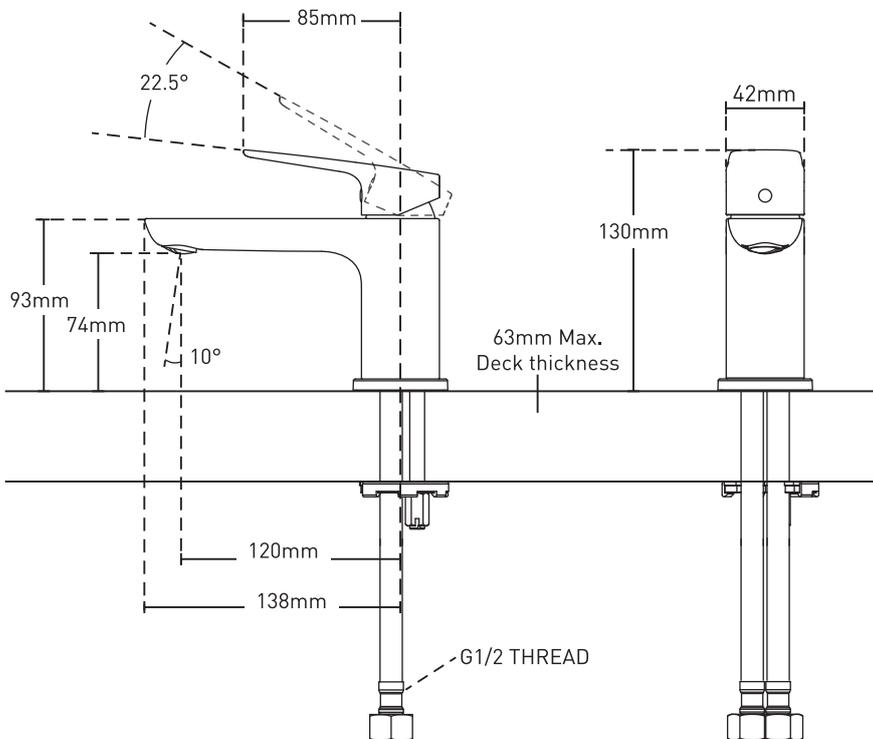

CRITICAL DIMENSIONS DO NOT SCALE