

MOEN® 摩恩

Specifications

DESCRIPTION

- Chrome finish
- G1/2 connections
- Thermostatic valve design and with 3F hand shower

OPERATION

- Knob style handle
- Safety stop preset temperature at 38°C
- Factory established temperature range from 20°C to 49°C

FLOW

- Water flow rate at 0.1Mpa is 6.0L/min minimum in tub spout, about 4.0 L/min to 9.0 L/min with hose and handheld shower.

CARTRIDGE


- Thermostatic cartridge design with Nonmetallic/no-ferrous material

STANDARDS

- Designed to meet QB/T 2806

WARRANTY

- 5 years limited warranty against leaks and dirps.

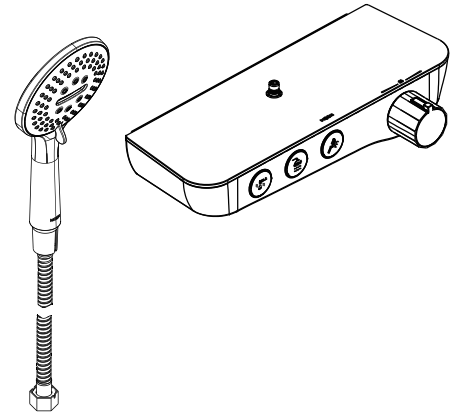


Cynthia

Push Botton Thermostatic Tub Shower Faucet

MODELS : 68335 Series

Units : mm

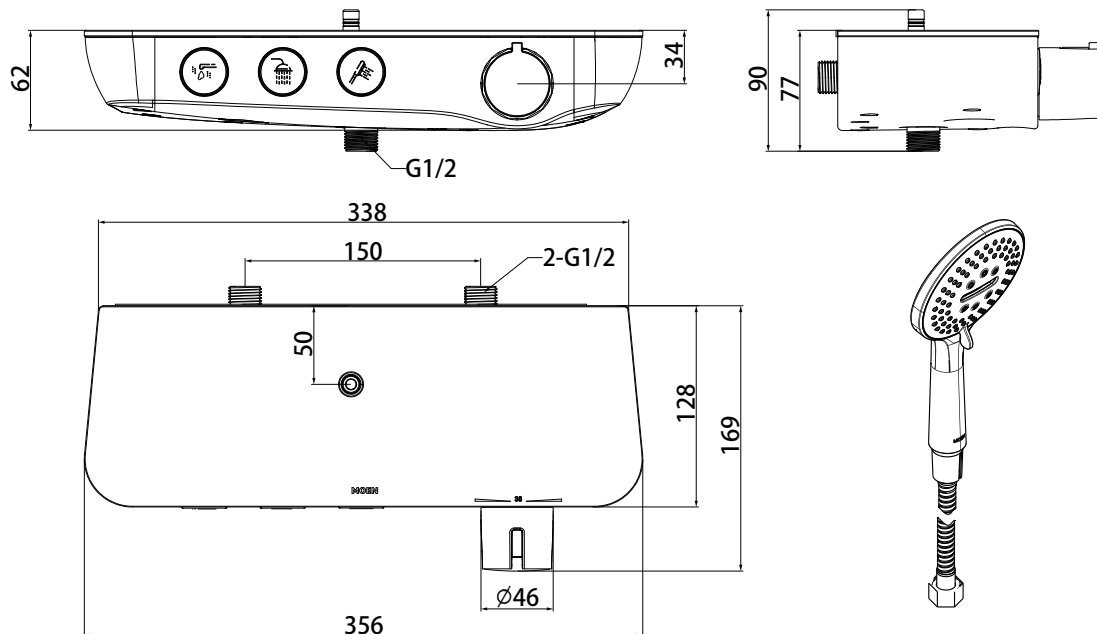

CRITICAL DIMENSIONS DO NOT SCALE