

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2" inlet connections

OPERATION

- Lever style handle
- Pull-on/Push-off
- Temperature controlled through 100 arc of handle travel

FLOW

- Flow rate is about 3.0L/min to 4.5L/min at 0.1 MPa

CARTRIDGE


- Duralast cartridge design

STANDARDS

- Designed to meet GB18145

WARRANTY




- 5 years limited warranty against leaks and drips

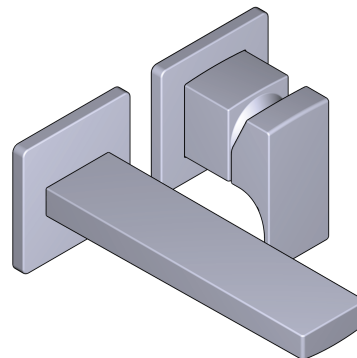

Duna

Single-Handle Wall-Mount Lavatory Faucet

MODELS: GN54124 Series

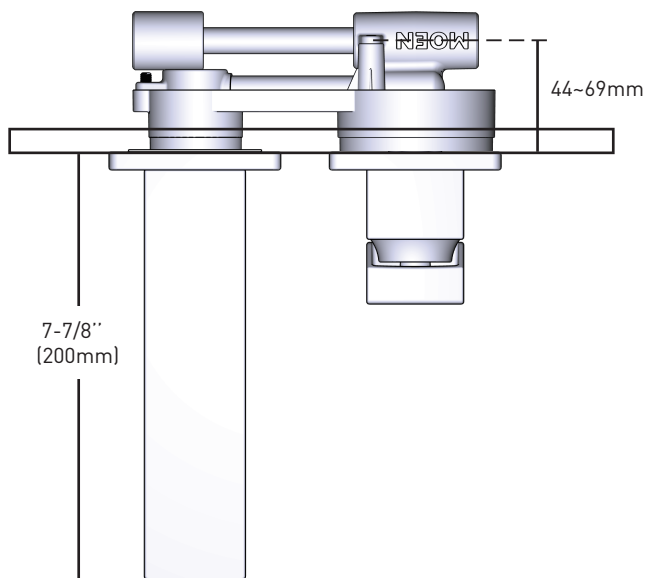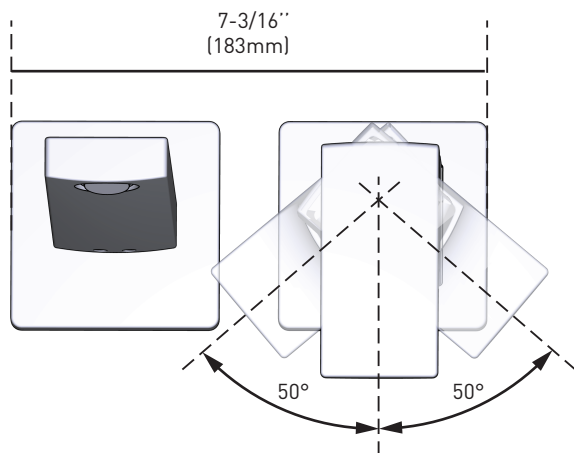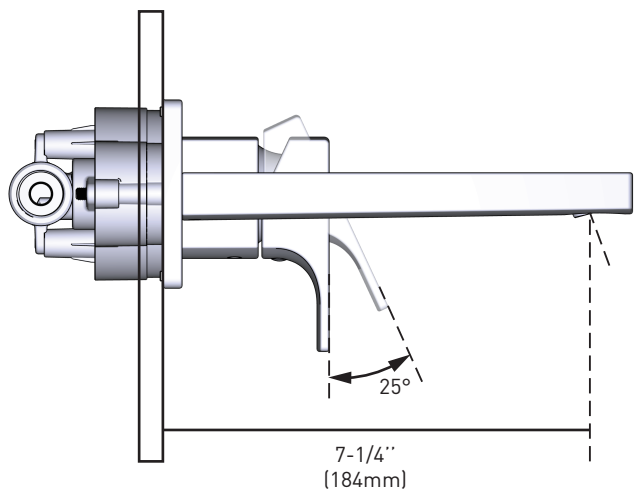

CRITICAL DIMENSIONS DO NOT SCALE