

MOEN® 摩恩

Specifications

DESCRIPTION

- G1/2 inlet connections
- Metal construction with various finishes identified by suffix
- It concludes mouth wash water in front of the faucet body

OPERATION

- Pivot action lever style handle
- Operates with soft water

FLOW

- Water flowrate is about 3.0 L/min to 4.5 L/min at 0.1 Mpa
- Water flow difference is limited to 3.0 L/min minimum from 0.1 Mpa to 0.3 Mpa
- The flow of mouthwash is not more than 1.5 L/min, the water pressure is 0.1 Mpa to 0.86 Mpa.

CARTRIDGE


- Sedal cartridge

STANDARDS

- Designed to meet GB 18145, GB 25501 (Grade 1)

WARRANTY


- 5 years limited warranty against leaks and drips

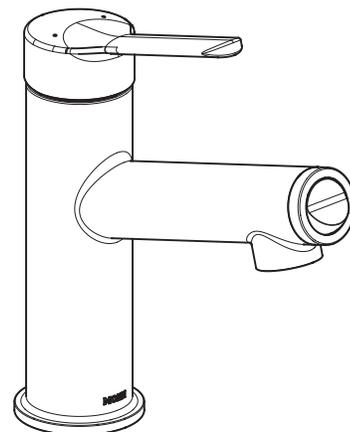

Noah™

Mouth wash faucet

MODELS: GN60021 series

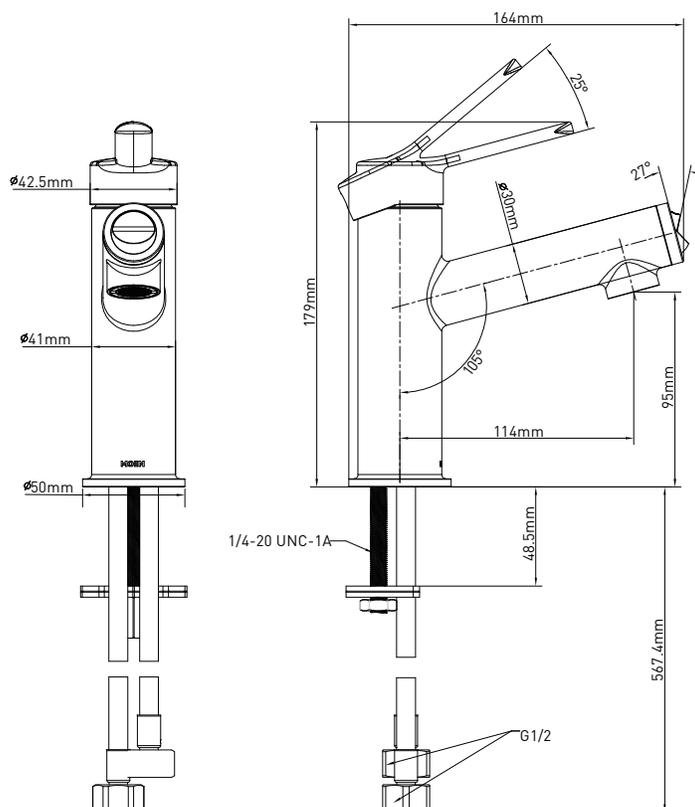

CRITICAL DIMENSIONS DO NOT SCALE